

Phoenix Axial Air Mover

with FOCUS™ Technology

3000+ CFM of Air Flow, Low Amps

The Phoenix Axial Air Mover revolutionized evaporative drying by producing 3000 CFM of airflow while using less than 2.5 amps of electricity (high speed). The Phoenix Axial Air Mover is the industry's only air mover specifically engineered with patented Focus™ Technology. Focus™ Technology not only produces air velocities greater than competitive products, but also focuses those velocities on hard-to-dry areas such as carpet and pad, sub-floor and walls.


The Phoenix Axial Air Mover operator interface is conveniently located for easy access and features a power indicator lamp, a 3-position switch, an hour meter, a GFCI outlet, and a circuit breaker, eliminating nuisance trips to the breaker box.

Performance

- 3000 cfm (High Speed)
- Greater air velocities than competitive products
- Focused velocities 0 to over 23.5 feet
- Directs air flow towards problematic corners, where the wall meets the floor
- Capable of reducing secondary damage claims stemming from the side-effects of trapped humidity like fungi, mold, mildew or structural damage
- Long-life 2-speed motor
- Low noise, quiet operation

Construction

- Lightweight and compact Linear Low Density Polyethylene (LLDP) housing is washable, chemical resistant and stacks for storage
- Colored Restoration Red for high visibility
- Ergonomic handle

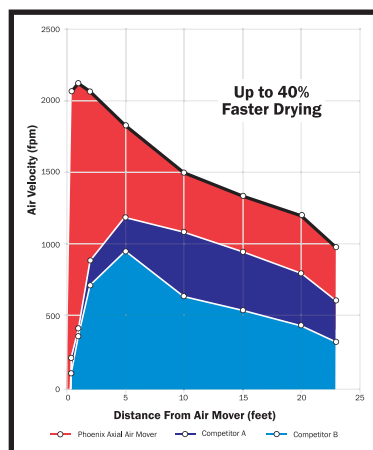

Patent 7,331,759

with **FOCUS™**
TECHNOLOGY



Intertek

Xactimate Code:
WTRDRY+

Features

- Less than 2.5 amps on High Speed
- Power-on indicator light
- Automatic hour meter displays site run time
- On-board power management:
- Circuit breaker protects air mover and attached devices and prevents nuisance visits to the junction box
- GFCI protection promotes operator safety in wet applications
- Duplex AC outlet allows daisy chaining of up to four axial air movers
- 20 ft AC cord with cord management
- Units interlock for ease of stacking during storage and handling
- Weighs 2.5 lbs less than competitive units
- Over 3000 CFM on high

Patent 7,331,759

Made in USA

www.UsePhoenix.com

innovative
DESIGN

exceptional
VALUE

proven™
PERFORMANCE

Phoenix Axial Air Mover

Specifications

Part No.	4025200
Drive Motor	1/4 hp 1-phase 110/120 VAC 2-speed 4-pole, PSC Electric Motor.
CFM	Approximately 3000
Cord	20 ft Power Cord
Outlet	15A UL Rated GFCI Duplex Receptacle
Current Draw	2.5 Amps (High Speed)
Voltage	115 VAC
Warranty	Year One - 100% parts and labor (all components) Year Two - 100% parts only (all components) Year(s) Three through Seven - Materials and workmanship of the housing only.


Dimensions

	Machine	Shipping
Width	19.125"	19.375"
Height	19.5"	20"
Depth	15.2" (intake to exhaust)	15.5"
Weight	29.5 lbs	32.7 lbs


Popular Accessories And Replacement Parts

4025092	Motor
4025095	Blade
4021597	Hour Meter
4025205	GFCI Duplex Outlet
4025203	Circuit Breaker
4025460	AAM Stand


Patent 7,331,759

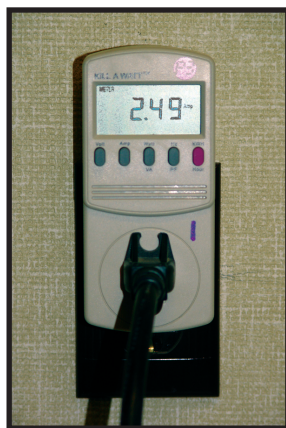

Low Amp Draw - 2.5 Amps on High Setting

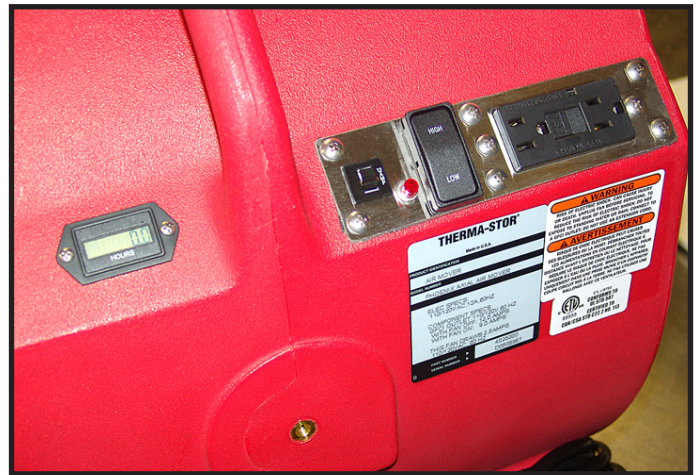

Innovative control panel includes power-on light, run-time hour meter, GFCI outlet and more.

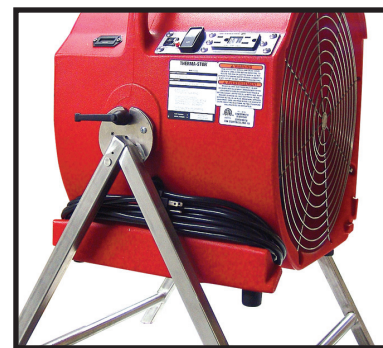

Units interlock for ease of stacking during storage and handling.

