

Miller RA15-1 Reusable Roof Anchor

Description

The RA15-1 Reusable Roof Anchor is used to provide temporary, reusable roof anchorage for residential and construction applications. The RA15-1 comes complete with ten (10) reusable anchors, D-rings and screws.

The RA15-1 is approved for use on both wood and metal roofing. Different screws are required.

Materials

Anchor: 14 gauge steel

D-Ring*: Clear Chromate Finished Carbon;
*Meets ASTM fifty-hour salt spray test requirements.

Roofing

Screws: #12 2-½ in. pan head sheet metal screws

Metal Roofing

Screws*: #12 2-½ in. TEK self-tapping screws
*Sheet metal must be a minimum of 20 gauge (0.036-in.) thickness and each TEK screw must completely go into a structural member (e.g. purlins of Z bar or C bar).

Requirements

1. RA15-1 roof brackets must be used only with Miller approved components that limit the fall arresting forces to 900 lbs. or less.
2. Support structure at anchor site must supporting a 5,000 lb static load.

Technical


Weight: 1.24 lbs (0.56 kg) each

Max. Working Load: 310 lbs (140.62 kg)


D-ring Min. Tensile: 5,000 lbs (22kN)

Certification

Meets OSHA 1926.502(d)(16)(v) requirements

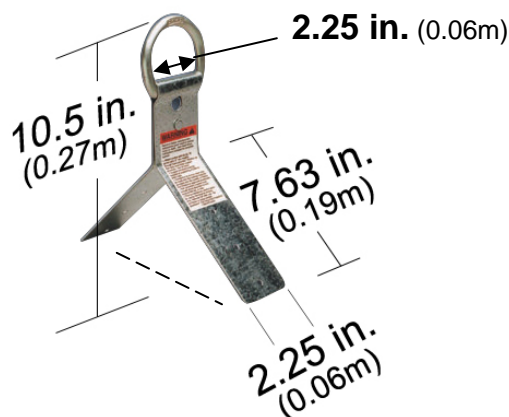

Use only with locking carabiner or Miller approved snap hook

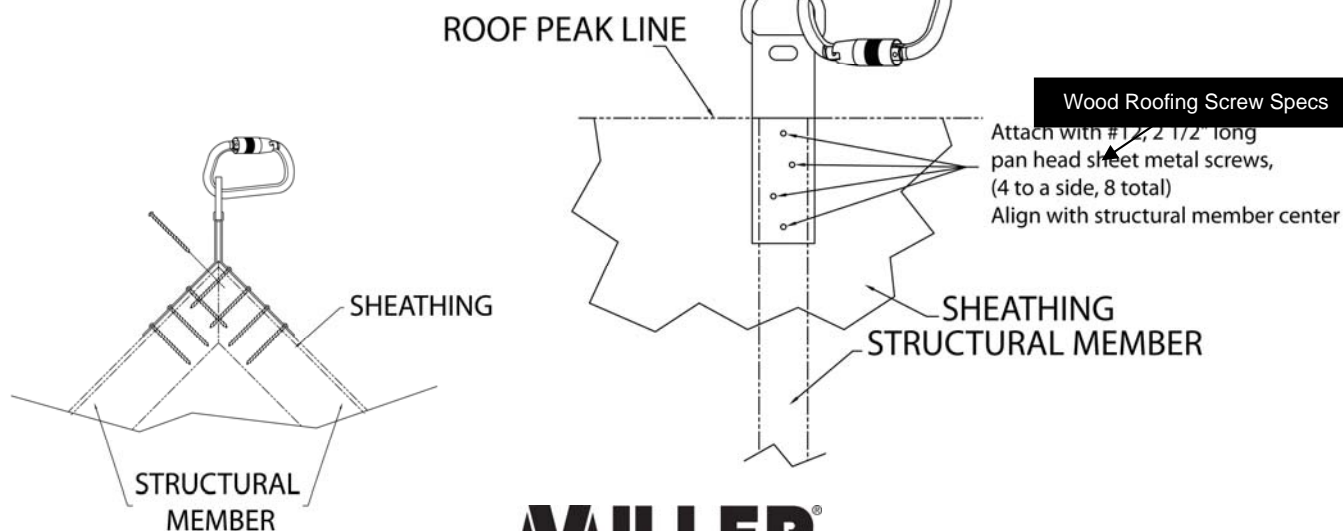

MILLER®

by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

⚠ WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.