




## Connectable Spill Berm #SPB10C - 2.25" x 10' x 1.37", 1 each/package

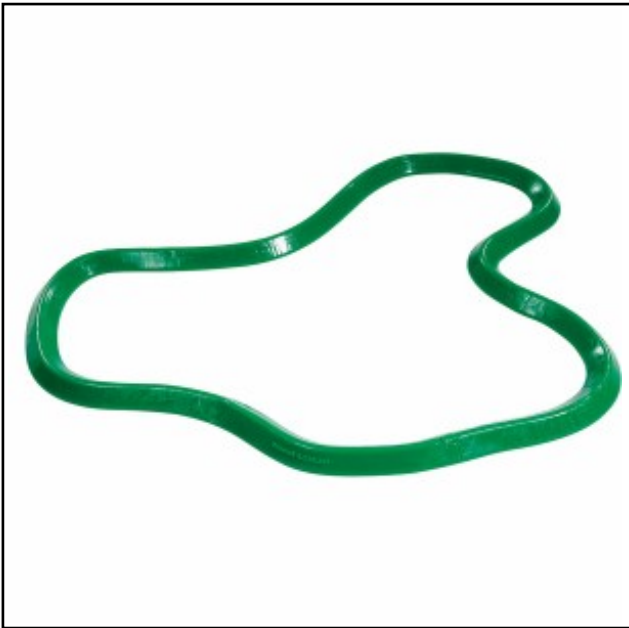

A tacky bottom helps this Spill Berm create a tight seal to confine leaks around machines or guard drains.

- Easily Bends to Fit any Angle or Curve: Made of flexible 100% polyurethane elastomer, so it's non-absorbent and resistant to a wide variety of chemicals and fluids.
- Sturdy and Reusable: Quick-connect interlocking ends "snap" individual sections together to create longer lengths, so you can contain almost any spill. Just clean it with soap and water, then it's ready to reuse. Note: Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity, and UV radiation. Typical life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. For more details and for chemical compatibility, please call Customer Service at 800.228.3877 or use our live chat feature. These products are for temporary use only. Pick up after each use, clean, then store properly. Do not leave down for extended periods of time or drive over with vehicles.

### SPB10C Specifications

<b>Dimensions:</b>	2.25" W x 10' L x 1.37" H
<b>Shipping</b>	8" W x 15" L x 5" H
<b>Dimensions:</b>	
<b>Sold as:</b>	1 per package
<b>Color:</b>	Green
<b>Composition:</b>	Polyurethane
<b># per Pallet:</b>	28
<b>Incinerable:</b>	No
<b>Ship Class:</b>	70

### Metric Equivalent Specifications

<b>Dimensions:</b>	5.7cm W x 3m L x 3.5cm H
<b>Shipping</b>	20.3cm W x 38.1cm L x 12.7cm H
<b>Dimensions:</b>	



Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[spilltech@spilltech.com](mailto:spilltech@spilltech.com)

## SPB10C Technical Information

### Warnings & Restrictions:

#### Urethane Notice

Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity, and UV radiation. Typical life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. For more details and for chemical compatibility, please call Customer Service at 800.228.3877 or use our live chat feature. These products are for temporary use only. Pick up after each use, clean, then store properly. Do not leave down for extended periods of time or drive over with vehicles.

### Regulations and Compliance:

40 CFR 263.30(a) - In the event of a spill, transporters must, "take appropriate immediate action to protect human health and the environment."

40 CFR 112.7(c)(1) - Facilities must have "appropriate containment and/or diversionary structures to prevent discharge oil from reaching a navigable water course."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Material Safety Data Sheet (MSDS)

Chemical Compatibility (CCG)



Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[spilltech@spilltech.com](mailto:spilltech@spilltech.com)