




Your one stop source for heavy duty, performance tested, surface preparation equipment to meet your most demanding applications. Our combined 60 years experience and expertise in the industry assures you, our valued customer, will receive the right equipment for the right job.

Specializing in equipment for the removal of paint, rust and coatings from steel and concrete surfaces, Novatek is the name you can rely on for:

**DEPENDABILITY,
PERFORMANCE
AND SERVICE**

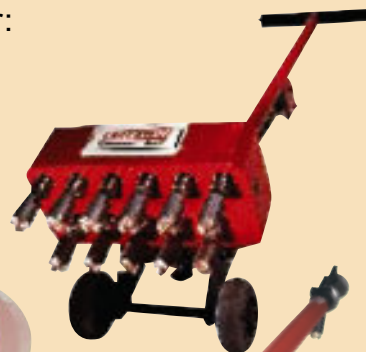

1-866-563-7800

Visit our website for more information, new product releases and the latest offers.

www.NovatekCorporation.com



Your One Source for Surface Preparation and Materials Removal

Durable and Dependable

Novatek is the name you can rely on for all your surface preparation needs. All equipment manufactured by Novatek is designed to be durable, dependable and to perform efficiently.

High Performance and Industry Tested

Novatek supplies only the finest industrial surface preparation equipment available. All Novatek / Trelawny products are manufactured to the highest quality standards to ensure years of trouble free operation. Whether you are removing coatings, rust, scale, concrete, sheet goods or virtually any other material, Novatek has the product to get the job done.

With tools ranging from hand held machines for spot cleaning to large "walk behind" concrete grinders and scarifiers, Novatek can custom tailor a system that will maximize production and provide the most cost-effective method available. All equipment provided by Novatek has the ability to be shrouded for dustless applications. For your next coatings removal / surface preparation project be sure to contact Novatek for a free on-site demonstration.

"We let the tools do the talking!"

If you would like more information about the advantages of using the Novatek Products, please call us toll free at

1-866-563-7800




TABLE OF CONTENTS

Needle Scalers	4 - 5
Long Reach Scrapers	6
Long Reach Breaker	7
Pole Scabblers	7
Long Reach Chisels & Scrapers	8 - 9
Scaling Hammers	10 -11
SF11 – Scale Force 11	12
MHS11 – Multi Head Scabblers	13
TFP – Floor Scarifiers & Cutters	14 -16
NOVAIR 2000 – Negative Air Machine	16
TCG10 – Concrete Floor Grinder	17

Marine Products

Trident Neptune - Deck Scaler	18
Hydraflex – Hold Cleaning Gun	19

NEEDLE SCALERS

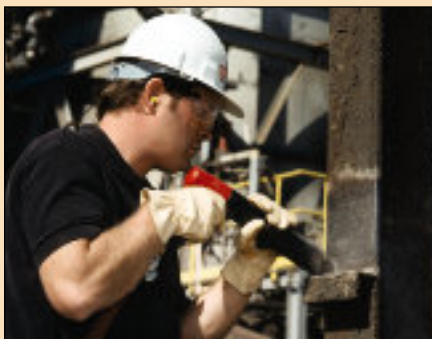


TRELAWNY®

TRELAWNY Pneumatic Needle Scalers provide a thorough and effective method of removing coatings, corrosion and other accumulated materials. Needle scalers are also often used for texturing concrete. These scalers will work on almost any surface, especially irregular surfaces that are otherwise hard to prepare.

Commonly used as chisel scalers for brick raking, chipping and splitting applications, Trelawny Needle Scalers convert to Chisel Scalers in seconds.



Please consult Novatek for further details on our range of low vibration Needle/Chisel Scalers.

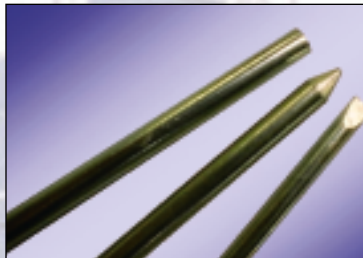

All Trelawny Needle Scalers are supplied with chisel tip needles as standard. Optional needles are available as listed below:



Flat Tip	2,3 or 4mm Dia.
Chisel Tip	3 or 4mm Dia.
Pointed Tip	3 or 4mm Dia.
Flat Tip Stainless Steel	3mm Dia.
Flat Tip Beryllium Copper	3mm Dia.

A selection of Trelawny Chisel Scalers can be fitted with standard or Spark Resistant Chisels.

FEATURES AND BENEFITS:

Various Sizes and Handle Configurations

- Choose the best tool for the application

Adjustable/Adaptable Round or Straight Front Tubes

- Concentrates needle coverage for better results
- Less chance of needles bending

Versatile/Interchangeable Chisel Holders

- Accepts industry standard 1/2" (12mm) square shank chisels
- 3BPG Model has a special chisel holder option for Trelawny 5/8" (16mm) hexagon shank chisels and scrapers up to 12" (300mm) wide

Minimum Parts, Maximum Performance

- All moving parts are steel (not plastic), for longer tool life and low maintenance

Flexible Chisel Positioning

- Provides operator comfort resulting in less fatigue

Low Vibration


- Vibro-Lo range for reduced risk of vibration related injuries

NEEDLE

SCALERS



Needle/Chisel Scaler kits available, includes a selection of spare needles & chisels to cover a range of applications

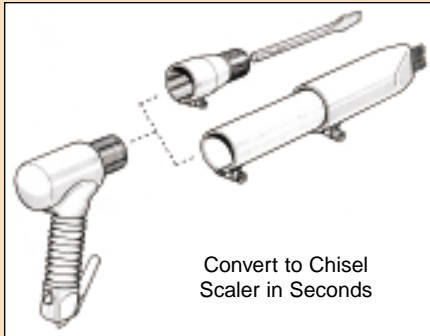

Convert to Chisel Scaler in Seconds

TRELAWNY®

1

2



Model VL202
Pistol Grip

4

5



Model 1B
In-Line

8

9



Model 2BPG
Pistol Grip

12

13



Model 3BPG
Pistol Grip

3



Model VL303 Challenger
Pistol Grip

6

7



Model 2B
In-Line

10

11



Model 3B
Off Set Grip

14



15



Model 4B
Off Set Grip

Item No.	Model	Part No.	Needle Qty	Weight	Length	B.P.M.	Air Consumption
1	VL202 Needle Scaler	196.2099	19 x 3mm	7.7lbs(3.5kg)	16.7"(425mm)	2200	5.5cfm (156lpm)
2	VL202 Chisel Scaler	196.2299	N/A	7.9lbs(3.6kg)	15.7"(400mm)	2200	5.5cfm (156lpm)
3	VL303 "Challenger" Needle Scaler	196.3099	28 x 3mm	7.7lbs(3.5kg)	14.5"(370mm)	3000	5.5cfm (156lpm)
4	1B Needle Scaler	111.1099	12 x 3mm	3.6lbs(1.7kg)	13.5"(343mm)	3800	3cfm (84lpm)
5	1B Chisel Scaler	114.1299	N/A	3.5lbs(1.6kg)	12.3"(313mm)	3800	3cfm (84lpm)
6	2B Needle Scaler	121.2099	19 x 3mm	5.8lbs(2.6kg)	14.8"(375mm)	3000	5.5cfm (156lpm)
7	2B Chisel Scaler	124.2299	N/A	4.4lbs(2.0kg)	13.5"(343mm)	3000	5.5cfm (156lpm)
8	2BPG Needle Scaler	123.2199	19 x 3mm	5.7lbs(2.6kg)	12.4"(315mm)	3000	5.5cfm (156lpm)
9	2BPG Chisel Scaler	125.2399	N/A	4.6lbs(2.1kg)	10.2"(260mm)	3000	5.5cfm (156lpm)
10	3B Needle Scaler	131.3099	28 x 3mm	9.9lbs(4.5kg)	18.3"(465mm)	2200	8cfm (226lpm)
11	3B Chisel Scaler	134.3299	N/A	7.5lbs(3.4kg)	16.8"(426mm)	2200	8cfm (226lpm)
12	3BPG Needle Scaler	133.3199	28 x 3mm	8.3lbs(3.8kg)	13.5"(342mm)	2200	8cfm (226lpm)
13	3BPG Chisel Scaler	135.3399	N/A	5.8lbs(2.6kg)	13.3"(339mm)	2200	8cfm (226lpm)
14	4B Needle Scaler	141.4099	35 X 4mm	13.0lbs(5.9kg)	19.0"(482mm)	2200	8.5cfm (240lpm)
15	4B Chisel Scaler	144.4299	N/A	8.8lbs(4.0kg)	17.3"(440mm)	2200	8.5cfm (240lpm)

LONG REACH SCALERS

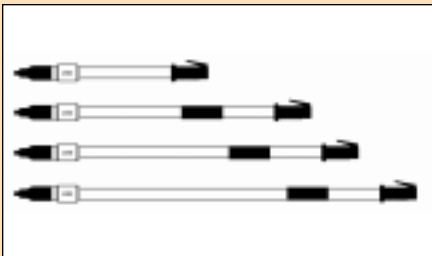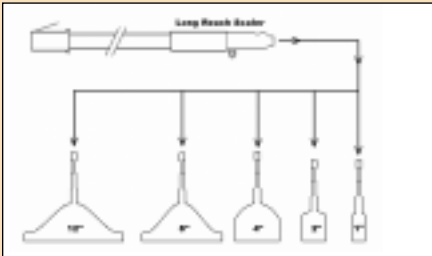

TRELAWNY Long Reach Scalers are specifically designed to reduce the risk of back injury and to extend their use into previously inaccessible areas. Available in 2ft, 4ft, 5ft and 6ft lengths. The Long Reach 'LITE' scalers are lighter in weight than standard Long Reach Scalers while offering the same power.

A vast range of applications include the removal of floor tiles, residue, chemical spillages, ice, roofing materials, metal slag and tank cleaning. These tools are ideal for a variety of uses from construction and marine to general factory maintenance and flooring services. To help save on backaches, utilize our ergonomically designed Python Long Reach. Available accessories include Needle Scaling attachments, Scraper blades and a full range of standard 5/8" hexagon shank chisels including spark resistant beryllium copper chisels for use in hazardous areas.

FEATURES AND BENEFITS:

Exclusively Designed Chisel Holder

- Modern single ball retainer for safe lock and quick fit
- Choose from the widest range of chisel and scraper blade widths available anywhere: 1" (25mm) to 12" (300mm) including 2" (50mm) and 4" (100mm) spark resistant sizes (see pages 8 & 9 for chisel / scraper details)

The True Convertibles

- Converts to needle scaler in seconds

Air Efficient & Economical To Use

- Consumes only 5 CFM @ 90 PSI. (2.1lps)
- Can be powered by a 2 HP compressor

Ruggedly Built

- Low maintenance, long service life
- Continued performance, even in harsh environments



TRELAWNY

Model	Part No.	Weight	Length	B.P.M.	Air Consumption
2ft Needle Scaler	137.3299	11.6lbs(5.3kg)	33.9"(860mm)	2200	5cfm(126 lpm)
2ft Chisel Scaler	136.3299	10.2lbs(4.6kg)	29.2"(740mm)	2200	5cfm(126 lpm)
4ft Needle Scaler	137.3499	12.8lbs(5.8kg)	48.0"(1220mm)	2200	5cfm(126 lpm)
4ft Chisel Scaler	136.3499	11.5lbs(6.2kg)	43.3"(1100mm)	2200	5cfm(126 lpm)
4ft LITE Needle Scaler	137.3497	8lbs(3.6kg)	48.0"(1220mm)	2200	5cfm(126 lpm)
4ft LITE Chisel Scaler	136.3497	6.6lbs(3.0kg)	43.3"(1100mm)	2200	5cfm(126 lpm)
5ft Needle Scaler	137.3599	15lbs(6.8kg)	59.8"(1520mm)	2200	5cfm(126 lpm)
5ft Chisel Scaler	136.3599	12.9lbs(5.9kg)	55.1"(1400mm)	2200	5cfm(126 lpm)
5ft LITE Needle Scaler	137.3597	9lbs(4.1kg)	59.8"(1520mm)	2200	5cfm(126 lpm)
5ft LITE Chisel Scaler	136.3597	7.5lbs(3.4kg)	55.1"(1400mm)	2200	5cfm(126 lpm)
6ft Needle Scaler	137.3699	14.8lbs(6.7kg)	72.0"(1830mm)	2200	5cfm(126 lpm)
6ft Chisel Scaler	136.3699	13.9lbs(6.3kg)	67.3"(1710mm)	2200	5cfm(126 lpm)
6ft LITE Needle Scaler	137.3697	9.5lbs(4.3kg)	72.0"(1830mm)	2200	5cfm(126 lpm)
6ft LITE Chisel Scaler	136.3697	8.4lbs(3.8kg)	67.3"(1710mm)	2200	5cfm(126 lpm)
PYTHON	156.6599	16.8lbs(7.6kg)	66.1"(1680mm)	2200	5cfm(126 lpm)



BREAKER

HEAVY DUTY LONG REACH



LRS55

POLE SCABBLER & COMPACTOR

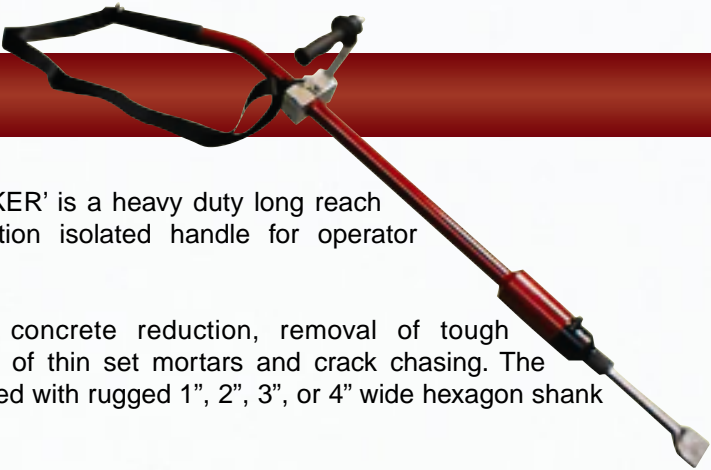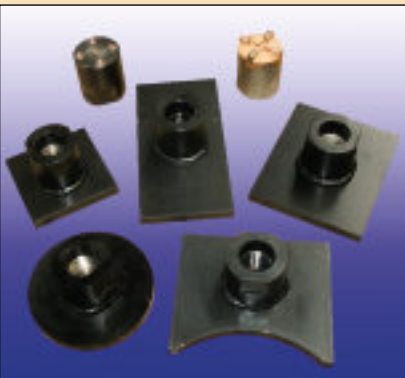

The **Trelawny** 'BREAKER' is a heavy duty long reach breaker with a vibration isolated handle for operator comfort.

Applications include concrete reduction, removal of tough ceramic tiles, removal of thin set mortars and crack chasing. The 'BREAKER' can be fitted with rugged 1", 2", 3", or 4" wide hexagon shank chisels.

FEATURES AND BENEFITS:

- Modern single ball retainer for safe chisel locking and quick change
- Choice of rugged 1", 2" or 3" wide chisels with industry standard 7/8" hexagon shank (see page 9 for chisel details)
- Vibration isolated handle for operator comfort
- Reduces damage to concrete substrates

Model	Part No.	Weight	Length	B.P.M.	Air Consumption
BREAKER	157.5599	27lbs(12.3kg)	58.3"(1480mm)	2000	20cfm(564 lpm)

TRELAWNY



Ahead in their class, Trelawny's Long Reach Scabblers and Compactors can be supplied with interchangeable scabbling heads and tamper feet to suit most applications. They are the most powerful tools for deep concrete dressing and for filler tamping especially in and around deep foundations and utility poles (when fitted with 4" or 6" tamper foot)

Model	Part No.	B.P.M.	Air Consumption	Weight
LRS55 c/w 5 point scabbler head	150.5099	1100	25cfm	30lbs(13.4kg)
LRS55 c/w 4"x4" compactor foot	150.5091	1100	25cfm	29lbs(13kg)
LRS55 c/w 6"x5" compactor foot	150.5092	1100	25cfm	30lbs(13.4kg)

TRELAWNY







FEATURES AND BENEFITS:

- 9" Throttle Handle**
- Greater control & reduces fatigue
- Angled Air Inlet**
- For operator safety
 - Situated below the throttle for better maneuverability
- Large Piston Diameter**
- Greater productivity
- Selection of Heads Available**
- Interchangeable scabbler and tamper heads for greater versatility

CHISELS & NEEDLES



1/2" (12mm) SQUARE SHANK

Chisels for Trelawny Scaler models – 1B, 2B, 2BPG, 3B, 3BPG, 4B

	Part No.	Shank Type	Blade Width	Chisel Length	Special Applications
	704.1101	Square	3/4" (19mm)	7" (178mm)	Weld spatter removal
	704.1103	Square	2" (50mm)	7" (178mm)	Wide flat chisel for the removal of peeling paint and rust
	704.1107	Square	3" (75mm)	7" (178mm)	Wide flat chisel for the removal of peeling paint and rust
	704.2105	Square Cranked	1 3/8" (35mm)	7" (178mm)	Scraping thick coatings
	704.1110	Square	2" (50mm)	7" (178mm)	Spark resistant Aluminum Bronze for use in hazardous areas
	704.1106	Square	1/2" Diamond Point	7" (178mm)	Mortar rake for re-pointing brickwork

5/8" (16mm) HEXAGON SHANK




Chisels to suit Trelawny range of Long Reach Scalers including the Trelawny Python and 3BPG model Chisel Scaler (when fitted with 5/8" Chisel Holder)


	Part No.	Shank Type	Blade Width	Chisel Length	Special Applications
	705.1101	Hex Straight	1" (25mm)	8" (203mm)	Flat chisel for sand cast chipping
	705.1106	Hex Straight	2" (50mm)	8" (203mm)	Removal of Tile/ Linoleum from floors
	705.1102	Hex Straight	4" (100mm)	8" (203mm)	Removal of Tile/ Linoleum from floors
	705.1100	Hex Straight	2" (50mm)	8" (203mm)	Spark Resistant Aluminum Bronze for use in hazardous areas
	705.1112	Hex Straight	4" (100mm)	8" (203mm)	Spark Resistant Aluminum Bronze for use in hazardous areas
	641.3512	Hex Straight	4" (100mm)	8" (203mm)	Blade holder for scraper-also known as the YOKE with hardware

CHISELS & SCRAPERS

5/8" (16mm) HEXAGON SHANK

Scrapers to suit Trelawny range of Long Reach Scalers including the Trelawny Python and 3BPG model Chisel Scaler (when fitted with 5/8" Chisel Holder)

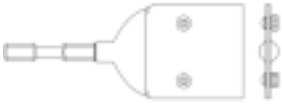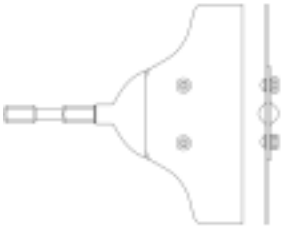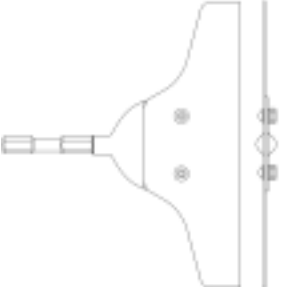
	Part No.	Shank Type	Blade Width	Chisel Length	Special Applications
	431.3904	Hex Straight	4" (102mm) Bevelled	10" (254mm)	Stubborn adhesive removal
	431.3928	Hex Straight	8" (203mm) Bevelled	10" (254mm)	Paint and coating spillage removal
	431.3922	Hex Straight	12" (305mm) Bevelled	10" (254mm)	Carpet and tile removal

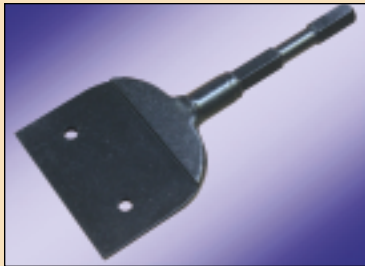


Blade Holder (Yoke)



Scraper Complete

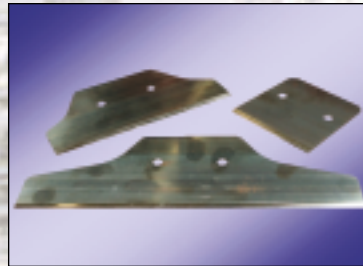

Replacement Scraper
Blades

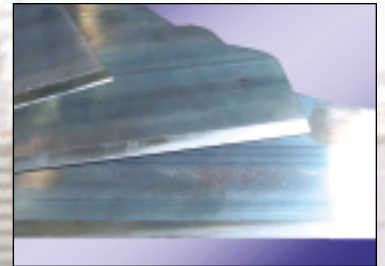

Bevel Edge


7/8" (22mm) HEXAGON SHANK

Chisels for Trelawny Long Reach Breaker

	Part No.	Shank Type	Blade Width	Chisel Length	Special Applications
	706.1101	Hex Straight	1" (25mm)	14" (360mm)	Removal of Terrazzo, Stubborn Ceramic, Marble Tiles and Thin-set
	706.1102	Hex Straight	2" (50mm)	14" (360mm)	Removal of Terrazzo, Stubborn Ceramic, Marble Tiles and Thin-set
	706.1103	Hex Straight	3" (75mm)	14" (360mm)	Removal of Terrazzo, Stubborn Ceramic, Marble Tiles and Thin-set
	706.1104	Hex Straight	4" (100mm)	14" (360mm)	Removal of Terrazzo, Stubborn Ceramic, Marble Tiles and Thin-set

SCALING/SCABBLING

HAMMERS

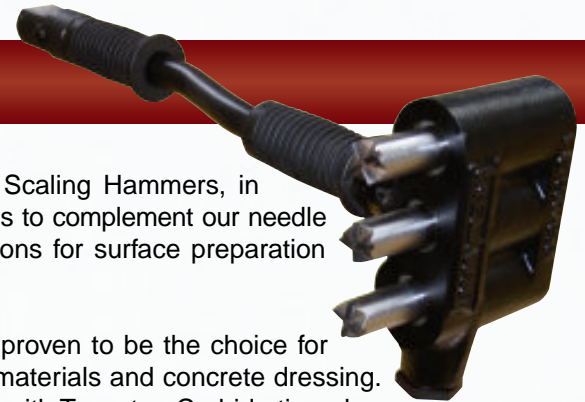

TRELAUNY single and triple head Scaling Hammers, in several distinct versions, are ideal tools to complement our needle scalers in more demanding applications for surface preparation and coatings removal.

Heavy Duty Scaling Hammers have proven to be the choice for “fracturing” thicker, tough to remove materials and concrete dressing. Trelawny Scaling Hammers are fitted with Tungsten Carbide tipped cruciform heads but can be fitted with Tungsten Carbide tipped bush hammer heads as an option.

The Trelawny Triple Scaling Hammer can be converted to an in-line configuration for hard to reach areas by simply exchanging the side handle for the main handle. Scaling Hammers use Tungsten Carbide replaceable heads or single piece piston-head combinations for the preparation of steel or concrete surfaces

CUTTER HEADS FOR USE IN SINGLE AND TRIPLE HEAD HAMMERS



426.5351
or
426.5353

Tungsten Carbide Tipped Cruciform Head – Detachable tapered (Standard) or threaded (Heavy Duty) fit heads. For use in Scaling Hammers on steel surfaces for the removal of thick coatings, heavy rust and scale.



606.5303

Beryllium Copper Head – Detachable tapered fit head. For use in Scaling Hammers on steel surfaces for the removal of thick coatings, heavy rust and scale. Can be used safely in combustible areas.



612.5320

Tungsten Carbide Tipped Cruciform Head – Heavy Duty one piece piston-head combination. For use on steel and concrete surfaces for removing thick coatings, heavy rust and scale, or texturing/profiling surfaces.



612.5325

Tungsten Carbide Tipped Bush Hammer Head – Heavy Duty one piece piston and head combined. For use on concrete for bushing, laitance removal and for exposing concrete aggregate.

FEATURES AND BENEFITS:

Replaceable Scaling Heads

- Quickly change heads in the field or the workshop
- Less downtime, lower maintenance costs
- Tungsten Carbide cruciform and bush hammer heads stay sharper longer

Nylon Brush Seals

- Cleans pistons on each and every stroke
- Improve performance and extends tool life

Single Screw Cap Design

- Simplifies piston replacement


Air Inlet/Side Handle Port

- Converts to in-line configuration for even more versatility
- Side handle mounts easily for comfortable grip and stability

TRELAUNY®

SCALING/SCABBLING

HAMMERS - Continued

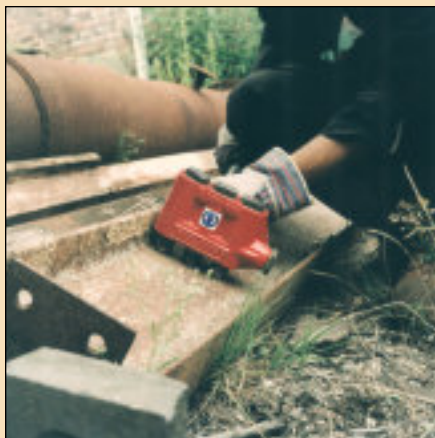

Single Scaler including replaceable Tungsten Carbide tipped taper fit head
Part No. 151.5199-Long Handle
Part No. 199.5150-Short Handle




Triple Scaler including replaceable Tungsten Carbide tipped taper fit heads
Part No. 153.5399-Long Handle
Part No. 199.5350-Short Handle



HD-Single Scaler including replaceable Tungsten Carbide tipped head
Part No. 199.5192-Long Handle
Part No. 199.5190-Short Handle



HD-Triple Scaler including replaceable Tungsten Carbide tipped heads
Part No. 199.5392-Long Handle
Part No. 199.5390-Short Handle

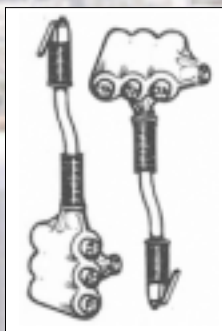

Triple Scaler/Scabbler in-line and standard configuration



Side handle supplied with all Triple Scalers/Scabblers





Optional Heavy Duty Single Piece Piston-Heads Available

TRELAUNY

Model	Part No.	Weight	Length	B.P.M.	Air Consumption
Single Scaler including replaceable cruciform head	151.5199 199.5150	6lbs(2.7kg) 4lbs(1.8kg)	18"(457mm) 9"(229mm)	3800	5cfm(144 lpm)
Triple Scaler including replaceable cruciform head	153.5399 199.5350	8lbs(3.6kg) 7lbs(3.2kg)	18"(457mm) 9"(229mm)	3 x 3000	11cfm(312 lpm)
Heavy Duty-Single Scaler including replaceable cruciform head	199.5192 199.5190	9lbs(4.1kg) 8lbs(3.6kg)	18"(457mm) 9"(229mm)	2500	6.5cfm(186 lpm)
Heavy Duty-Triple Scaler including replaceable cruciform head	199.5392 199.5390	13lbs(2.5kg) 12lbs(5.4kg)	18"(457mm) 9"(229mm)	3 x 2300	14cfm(408 lpm)

SF11

MULTI-HEADED STEEL DECK SCALER

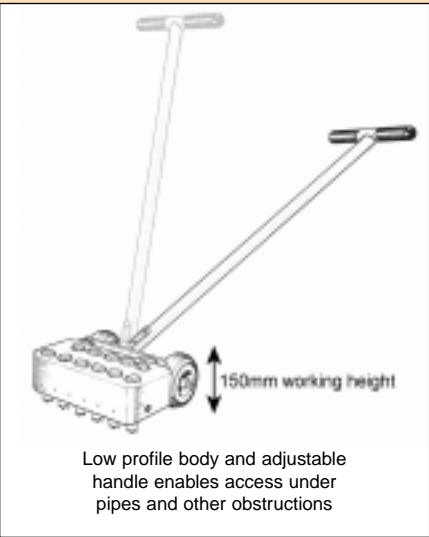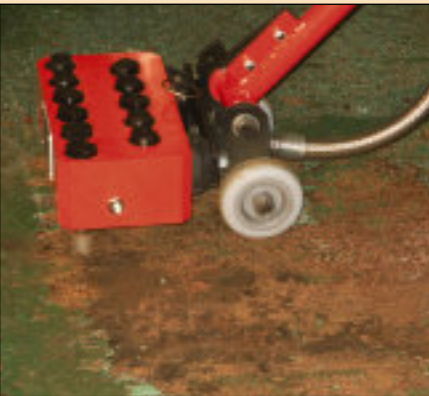

Low profile body and adjustable handle enables access under pipes and other obstructions




For use on steel surfaces- **Trelawny's** Scaleforce Eleven is ideally suited for thick coatings removal and surface preparation on large areas of deck and tank floor surfaces, complimenting the Trelawny hand held Scaling Hammer range. Eleven heads impacting at 3000 blows per minute break down the hardest of coatings.

- Specialist Application** - Breaking down hard coatings prior to floor blast cleaning, reducing cost of spent blast media
- Dust Containment** - A model with a durable light weight vacuum shroud is available where dust control is necessary. Consult Novatek for proper vacuum sizing.

FEATURES AND BENEFITS:

- Compact Body Design**
- Less than 12"(300mm) across for working between structures or up to 5/8"(15mm) from edges
- Solid Rubber Wheels**
- Permanently mounted for easy transport into confined areas
- Lightweight**
- Only 79lbs. (36kgs), easier to maneuver than competitive units
- Special Duplex Rubber Mounting System**
- Protects the operator from high vibration levels
 - Less fatigue
- Multi-position Handle**
- Allows easy access under obstructions
- Simple Operation/Transport Design**
- Lock and unlock in a flash
- Powerful Piston Action**
- 3000 blows per minute per piston



Now available with a single piece piston incorporating the cutter-head.
Tungsten Carbide
Cruciform or Bush Hammers Available

Model	Part No.	Weight	Length	Height	Width	Cutting Width	B.P.M.	Air Consumption
Scaleforce Eleven	159.5920	79.4lbs(36kg)	11.4"(290mm)	47.6"(1210mm)	11.1"(282mm)	9.92"(252mm)	11 x 3000	50cfm(1560 lpm)
Shrouded Scaleforce Eleven	159.5921	82lbs(37kg)	11.4"(290mm)	47.6"(1210mm)	11.1"(282mm)	9.92"(252mm)	11 x 3000	50cfm(1560 lpm)

MHS11

MULTI-HEADED CONCRETE FLOOR SCABBLER



For use on concrete, the Trelawny MHS11 Floor Scabbler was designed in association with senior construction engineers for removing concrete laitance while reducing the damage to the substrate. This prevents the penetration of water which freezes and can cause cracking of the substrate. Optional cruciform heads are available for material reduction with a smoother finish.

Dust Containment - All Trelawny floor machines are available with optional vacuum shroud for dust free working.

FEATURES AND BENEFITS:

Tungsten Carbide Tipped Heads

- 11 heads giving 2200 blows per minute per piston
- Designed to reduce damage to aggregate

Unique Trelawny Cutter-head Action

- Piston exhausts into chamber which reduces wear to moving parts
- Prolongs tool life

3 Point Vibration Damping System

- Reduces operator fatigue
- Gives better control

Low Air Consumption

- Only requires 70cfm
- Economic running costs
- Operates from a single tool compressor

Compact Design

- Body width of only 11" (280mm) wide for work between structures

Works Within 1/2" of Walls

- Reduces the need for further finishing, tools and operations

Large Rear Wheels

- Aid maneuverability



TRELAWNY®

Model	Part No.	Weight	Length	Height	Width	Cutting Width	B.P.M.	Air Consumption
MHS11	159.6000	154lbs(70kg)	13.4"(340mm)	50.8"(1290mm)	11.2"(285mm)	9.84"(250mm)	11 x 2200	70cfm(1982 lpm)
Shrouded-MHS11	159.6001	160lbs(70kg)	13.4"(340mm)	50.8"(1290mm)	11.2"(285mm)	9.84"(250mm)	11 x 2200	70cfm(1982 lpm)



TFP-9

The TFP-9 is the perfect solution for the toughest surface preparation job. The TFP-9's heavy duty quick change 6 shaft drum will make scarifying efficient and economical. The modern integral design of the TFP-9 provides an easier to maneuver unit and ensures even profiling and a higher work rate.

The TFP-9 is suitable for a variety of applications on concrete with leveling, cleaning, texturing, grooving and removing such materials as paint, thin-set, mortar, coatings, accumulated dirt, oil residue or any other contaminants.

Cuts up to 3/16" (5mm) when reducing concrete.

FEATURES AND BENEFITS:

Accurate Depth Control

- Improves overall performance
- Extends cutter assembly life
- Engage/Disengage handle keeps cutting depth constant

Stable Four Wheel Transport System

- Large diameter rear wheels for better mobility
- Additional two front wheels for stability

Fully Adjustable Handlebar


- Provides greater operator comfort
- Adjusts to each worker's height

Choice of Power Source

- Air, electric and gasoline models available

Vacuum Adaptor Fitted as Standard

- For removal of nuisance dust when attached to a **Novatek** vacuum system

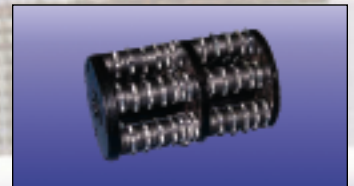


Heavy Duty Drum
Fitted as Standard


TFP-9 Models	Power Supply	Part No.
Gasoline Scarifier - loaded with Tungsten Carbide Cutters	Honda 8HP	329.9000
Electric 220/240v Scarifier - loaded with Tungsten Carbide Cutters	5HP	329.9005
Air Scarifier - loaded with Tungsten Carbide Cutters	5HP	329.9003



Tungsten Carbide Tipped Cutter

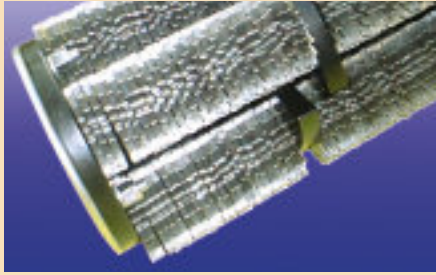


Star Cutter

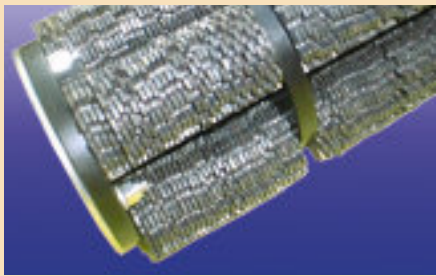


Beam Cutter



Milling Cutter

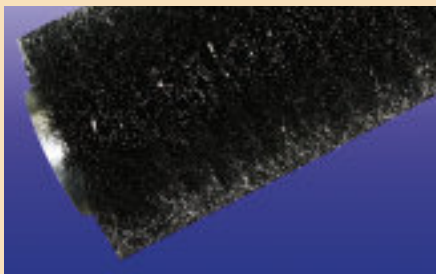

Wire Brush Assembly



STANDARD CUTTER TYPES

Tungsten Carbide Tipped Cutter – Hardened steel with Tungsten Carbide inserts for all concrete texturing, scabbling, planing and grooving applications. Also used for the removal of road markings, roof chippings and brittle coatings.

Star Cutters – Heat treated steel cutters for the removal of paint coatings and laitance from new floors. More aggressive than the beam cutter. Also used for removing build up of grease, dirt and ice.

Beam Cutter – Heat treated steel cutter for the removal of paint, coatings and laitance from new floors. Also for removing build up of grease, dirt and ice.

Milling Cutter – Tungsten Carbide tipped cutter for the removal of thermoplastic road and runway markings, bituminous and rubber deposits.

Wire Brush – Twisted knot or crimped wire, for general workshop cleaning and removal of light surface rust.(Only available for the TFP200)

Model	Heavy Duty Drum	
	Cutters	Washers
TFP-9 with TCT Cutters	72	240
TFP-9 with Star Cutters	372	0
TFP-9 with Beam Cutters	372	0
TFP-9 with Milling Cutters	42	132
TFP200 with TCT Cutters	76	88
TFP200 with Star Cutters	220	0
TFP220 with Beam Cutters	220	0
TFP200 with Milling Cutters	24	76

Model	Working Width	Weight	Length	Width	Height	Cutter Speed	Air Consumption	Power	Voltage
TFP-9 Gas	9"(225mm)	269lbs (122kg)	41"(1041mm)	17"(432mm)	37"(940mm)	2300	N/A	8HP	N/A
TFP-9 Electric	9"(225mm)	280 lbs (127kg)	41"(1041mm)	17"(432mm)	37"(940mm)	1650	N/A	5HP	220v – 240v
TFP-9 Air	9"(225mm)	269 lbs (122kg)	41"(1041mm)	17"(432mm)	37"(940mm)	1600	175cfm(4956 lpm)	5HP	N/A
TFP200 Gas	8"(200mm)	130 lbs (59kg)	31.5"(800mm)	13.8"(350mm)	39"(1000mm)	1833	N/A	5HP	N/A
TFP200 Electric	8"(200mm)	150 lbs (68kg)	31.5"(800mm)	13.8"(350mm)	39"(1000mm)	1650	N/A	3HP	110-440v
TFP200 Air	8"(200mm)	150 lbs (68kg)	31.5"(800mm)	13.8"(350mm)	39"(1000mm)	1650	115cfm(3256 lpm)	3HP	N/A



Model	Part No.
Gasoline	320.2000
110v Electric	320.2003
220-240v Electric	320.2005
380-440v Electric	320.2007
Air	320.2012

TFP200

The TFP200 presents a combination of innovative technology with performance tested features. The modern integral design of the TFP200 provides an easier to maneuver unit, and ensures even profiling and at a higher work rate.

Suitable for rapidly removing scale, rust, paint and other deposits from steel surfaces in preparation for re-coating.

FEATURES AND BENEFITS:

Stable Four Wheel Transport System

- Large diameter rear wheels for better mobility
- Additional two front wheels for stability

Fully Adjustable Handlebar

- Provides greater operator comfort
- Adjusts to each worker's height

Built in Safety Features

- Hold-to-run handle ensures the machine will not run unattended

Vacuum Adaptor Fitted as Standard

- For removal of nuisance dust when attached to a **Novatek** vacuum system



TRELAWNY®

Negative Air Machine



*"THE COMPLETE PACKAGE"
THE MOST POWERFUL
DURABLE & LIGHT WEIGHT
NEGATIVE AIR MACHINE
AVAILABLE!*

NOVAIR 2000

FEATURES AND BENEFITS:

- Powerful 2 Horse Power motor.
- 2 Speed motor - provides consistent air flow of 2000cfm (high speed) and 1000cfm (low speed)
- 8 point motor / cage mounting prevents motor and cage shifting even under the harshest condition.

"No more Rubbing Cages!"

- Seamless construction guarantees leak proof operation.
- Lightest 2000 CFM unit on the market breaks the 100 lb barrier.
- Positive lock filter prevents filter movement for uninterrupted filtration.
- Uses standard 24" x 24" HEPA filters.



Replacement Filter

Model	Part No.	Weight	Dimensions	Motor	Air Capacity	Power Requirements	Filtration
NOVAIR 2000	F2000	99 LBS	37" X 26" X 31"	2HP-Two Speed, Thermally Protected	High- 2000 CFM Low- 1200 CFM	115 Volt, 15 Amp,60Hz	Hepa Filter,1/2" Pad Ring Filter

TCG

FLOOR GRINDER



TCG-10

The TCG-10 Concrete Grinder is the perfect solution for tackling your toughest grinding surface preparation needs. The TCG-10 with 10" dual counter rotating discs makes quick work in a variety of applications.

Designed for :

- Removing high spots from concrete surfaces
- Grinding Terrazzo floor tiles
- Removing a build up of coatings and debris from floors
- Texturing floors for non-skid applications

FEATURES AND BENEFITS:

Choice of Power Source

- Gasoline or Electric Models Available

Heavy Duty Construction

- Ideal for Rental Industry

Horizontal Counter Rotating Discs

- Gives Better Control

Special Integrated "Weight Plate" System

- Supplied Extra Weights to Vary Production Rates

Wide Range of Abrasives

- Choose the media to suit your application
- Grinders supplied with Extra Coarse Stones

Diamond Inserts Available

- Unsurpassed performance
- Features dramatic longevity as opposed to stones



TCG-10 - Models		Power Supply	Part No.
Gasoline Grinder - Loaded with Extra Coarse Stones and Weight Kit		Honda 11HP	350.5511
Electric 220/240v Grinder - Loaded with Extra Coarse Stones and Weight Kit		5HP	350.5551

SPECIFICATIONS					
Height	Width	Length	Gross Weight	Cutting Width	Disc Size
36" (914mm)	26" (660mm)	48" (1220mm)	230lbs	24" (590mm)	2 x 10" (250mm)

TRIDENT NEPTUNE

DECK SCALERS



6 Cutter Head
340.581



Heavy Duty Leaf Head
340.550



Thin Leaf Head
340.548



6" Power Brush
340.160



Twisted Knot Cup Brush
340.167



Crimped Wire Cup Brush
340.166



6" Twisted Wire Brush
340.163

TRIDENT-NEPTUNE

The versatility of this deck scaler combined with the **TRELAWNY** reliability & quality has made this flexible shaft scaler the first choice for portable onboard de-scaling. The Trident Neptune will rapidly remove scale, rust, paint and other unwanted deposits or build-ups while leaving the surface ready for priming, painting or coating applications. This deck scaler is the ideal tool to reach into difficult areas on both horizontal and vertical surfaces. In addition to de-scaling decks, hatches, superstructures and wheelhouses, this machine allows work under piping and around areas previously inaccessible.



TRELAWNY



FEATURES AND BENEFITS:

- Choice of Power Source**
 - Electric or Air Models Available
- Heavy Duty Construction**
 - 25% Lighter Than Similar
 - Machines with Ergonomic Handle Design
- Compact Design**
 - Access Areas were other Deck Scalers Cannot
- Motor Protection**
 - Automatic Thermal Protection on Electric Models
- Replaceable Accessories**
 - Multitude of Different Scaling Heads, Cutters, Flails and Brushes Available


ALL MACHINES SUPPLIED WITH:

- Flexible shaft 10' long (3m) x 5/8" (16mm)
- Heavy Duty leaf scaling head
- 6 Cutter scaling head
- 6" Power brush
- Hand guard & Wrench set

Model	Part No.	Weight	Air / Power	Base	ISSA Code No.
110 Volt 50/60Hz Electric	340.TN/S/110	75lbs.	2hp	Skid	55.022.01
220 Volt 50/60Hz Electric	340.TN/S/220	75lbs	2hp	Skid	55.022.01
1.5HP Air	340.TN/S/490	70lbs.	66cfm@90psi 31.2lps@90psi	Skid	55.022.01

HYDRAFLEX

HOLD CLEANING GUN



Hose Adapter
342.HY05



Hose Couplings
342.HY03 & 342.HY04



TRELAWNY®

The Hydraflex has been specifically designed for Hold carriers and cargo vessels of all sizes.

The Hydraflex uses a combination of water and compressed air resulting in a powerful, tightly compressed jet of water able to reach up to 100 feet (30 meters) with adjustment to the control valve.

One man operation ensures hold cleaning time is reduced to an absolute minimum without the need of additional equipment such as scaffolding, pumps and scrapers.

FEATURES AND BENEFITS:

- Cleans Holds and Superstructures
- No Need for Trained Skilled Operator
- Easily Removes Cargo Residue, Flaking Paint and Rust
- Adjustable Control Valve Provides Suitable Jet Control for the Job at Hand
- High Quality Non-Corrosive Stainless Steel Material Ensures Almost Indefinite Life with Minimum Maintenance
- Easy & Fast Hook up with Instantaneous Couplings
- Choice of Water Hose Coupling Size 2" or 2 1/2"

ISSA Code No. 55.085.01 (Gun) 55.085.02 (Tripod/Stand)
IMPA Code No. 59.07.42 Trelawny Part No.(342.HY00/2 & 342 HY00/2.5)

Model	Part No.	Weight	Water Consumption (Recommended)	Water Pressure (Recommended)	Air Consumption (Recommended)	Air Pressure	Air Hose	Water Hose
Hydraflex Complete-Stand, Gun and 2" Coupling	342.HY00/2	Gun =13lbs (6kg) Stand = 20lbs (9kg) Total = 33lbs(15kg)	110 Gal./ Minute (485 Liter/Minute)	85 to 90 P.S.I. (6kg.cm²)	71 cfm (2m³/minute)	100 to 120 P.S.I. (7 to 8 kg/cm²)	3/4" (19mm)	2" (51mm) or 2½"(64mm)
Hydraflex Complete-Stand, Gun and 2 1/2" Coupling	342.HY00/2.5	Gun =13lbs (6kg) Stand = 20lbs (9kg) Total = 33lbs(15kg)	110 Gal./ Minute (485 Liter/Minute)	85 to 90 P.S.I. (6kg.cm²)	71 cfm (2m³/minute)	100 to 120 P.S.I. (7 to 8 kg/cm²)	3/4" (19mm)	2" (51mm) or 2½"(64mm)



B.P.M.=Blows Per Minute
lpm=Liters Per Minute
cfm=Cubic Foot/Minute
Aeq=Acceleration equivalent
LpA=Sound Pressure Level
LwA=Sound Power Level
psi=Pounds Per Square Inch

NOVATEK CORPORATION

155 Philips Road
Exton, PA. 19341
Toll Free: 866-563-7800
Tel: 610-363-7800
Fax: 610-363-9620
Email: Sales@Novatekco.com

MEMBER OF



As a major source of surface preparation equipment and the exclusive supplier of **TRELAWAY**, **Novatek** is a valuable resource with over 60 years of combined experience. **Novatek** offers a wide variety of Pneumatic, Electric and Gas powered equipment ranging from portable hand tools to large walk behind machines. We specially design our equipment for the efficient removal of paint, rust and coatings from steel or concrete surfaces. Whether you are spot cleaning coatings or removing concrete, **Novatek** has the equipment to **"DO THE JOB AND DO IT WELL"**.



All of our equipment is thoroughly tested under specified conditions in accordance with applicable internationally recognized standards. When a tool is used on site the conditions may not be the same as those used in our tests.

Novatek Corporation operates a policy of continuous product development and refinement and therefore reserves the right to change technical specifications and product designs without giving prior notice.

For further information on any **Novatek** product do not hesitate to contact our customer service department at **866-563-7800**.

Distributor:

Visit our website for more information, new product releases and latest offers.

www.NovatekCorporation.com