

Particulate Respirator 8577, P95 with Nuisance Level Organic Vapor Relief*

Issue Date 01/01/04

The 3M™ Particulate Respirator 8577, P95 is designed to help provide comfortable, reliable worker protection against certain oil and non-oil based aerosol particles including those present with nuisance levels of organic vapors* such as solvents, degreasers and resins.

An excellent choice for work settings involving heat, humidity, and long periods of wear. This respirator offers a number of benefits to you and your workers:

NIOSH approved P95

- At least 95% filtration efficiency against solid and liquid aerosols including oils.** TC-84A-1166

3M™ Cool Flow™

Exhalation Valve


- Proprietary one-way valve offers easy exhalation and cool, dry comfort.

Odor removing filter material

- Carbon layer provides relief from nuisance levels of organic vapors* for greater comfort.

M-noseclip

- Adjusts easily for fewer pressure points and greater comfort.
- Reduces the potential for eyewear fogging.
- Helps provide a custom fit and secure seal.

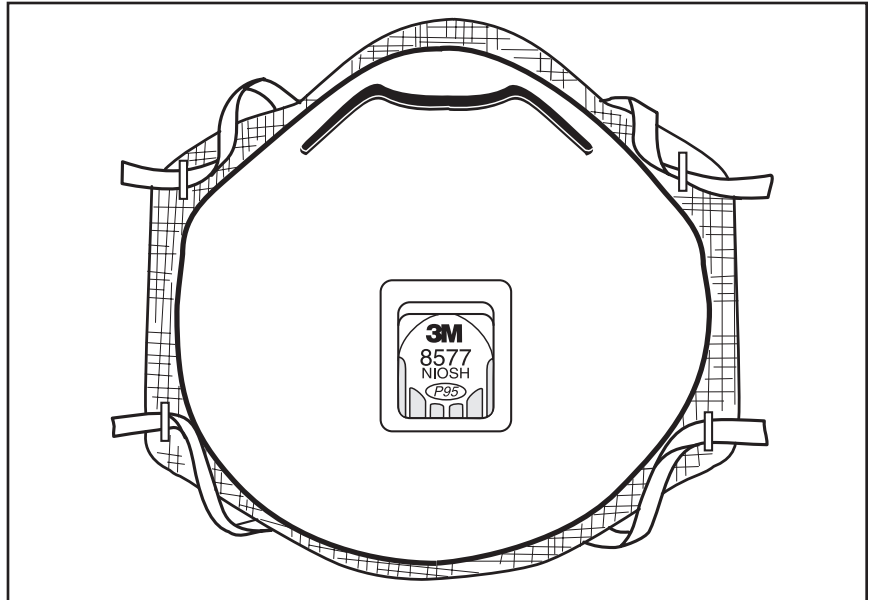

3M™ Particulate Respirator 8577, P95

Lightweight construction

- Promotes greater worker comfort.
- Contributes to increased wear time.

Braided headband

- Provides comfort and durability.


All filter design

- Helps provide economical protection.
- No spare parts to clean and maintain.
- Promotes easier communication.

Suggested Applications



- Foundry operations
- Lab settings
- Agriculture
- Petrochemical manufacturing
- Undercoating



WARNING

These respirators help reduce exposure to certain particles. **Misuse may result in sickness or death.** Before use, the wearer must read and understand **User Instructions** provided as a part of product packaging. Time use limitations may apply. For proper use, see package instructions, supervisor or call 3M OH&ESD Technical Service in U.S.A., 1-800-243-4630. In Canada, call 1-800-267-4414.

*3M recommended for relief against nuisance levels of organic vapors. Nuisance level organic vapor refers to concentrations not exceeding OSHA PEL or applicable exposure limits, whichever is lower.

**Tested against particles approximately 0.3 micron in size (mass median aerodynamic diameter) per 42 CFR 84.

Respirators Per Box	Respirators Per Case
10	80

Use For:

- Solids such as those from processing minerals, coal, iron ore, cotton, flour, and certain other substances.
- Liquid or oil based particles from sprays that do not also emit **harmful** vapors.
- Nuisance level organic vapor relief.

Do Not Use For:






Gases, asbestos, arsenic, cadmium, lead, 4,4'-methylenedianiline (MDA) or sandblasting. Organic vapors including those present in paint spraying operations, when concentrations exceed the OSHA PEL, or applicable exposure limits, whichever is lower. Aerosol concentrations that exceed 10 times the OSHA PEL, or applicable exposure limits, whichever is lower. This respirator does not supply oxygen.

Important

Before using these respirators, you must determine the following:

1. The type of contaminant(s) for which the respirator is being selected.
2. The concentration level of contaminant(s).

Technologies

				
3M™ Cool Flow™ Exhalation Valve Proprietary one-way valve for easy exhalation and cool, dry comfort.	M-noseclip Adjusts easily for fewer pressure points and greater comfort.	Advanced Electret Media Advanced electrostatically charged microfibers make breathing easier and cooler.	Odor-removing Filter Material Carbon layers remove many nuisance level odors for greater comfort and productivity.	P-Series Filter Featuring Advanced Electret Media, appropriate for prolonged use in both oil- and non-oil-containing environments.

3. Whether the respirator can be properly fitted on the wearer's face. Do not use with beards, on other facial hair, or other conditions that prevent a good seal between the face and the faceseal of the respirator.
4. Before use of these respirators, a written respiratory protection program must be implemented, meeting all the requirements of OSHA 29 CFR 1910.134, including training, medical evaluation and fit testing.

Time Use Limitation

If respirator becomes damaged, soiled, or breathing becomes difficult, leave the contaminated area immediately and dispose of the respirator. If used in environments containing only oil aerosols, dispose of respirator after 40 hours of use or 30 days, whichever is first.

Additional Information

This respirator contains no components made from natural rubber latex.

For more information, please contact:

3M Occupational Health and Environmental Safety Division (OH&ESD)

In the U.S., contact:

Sales Assistance

1-800-896-4223

Technical Assistance

1-800-243-4630

Fax On Demand

1-800-646-1655

Internet

<http://www.3M.com/occsafety>

For other 3M products

1-800-3M HELPS

In Canada, contact:

3M Canada Company, OH&ESD

P.O. Box 5757

London, Ontario N6A 4T1

Sales Assistance

1-800-265-1840, ext. 6137

Technical Assistance (Canada only)

1-800-267-4414

Fax On Demand

1-800-646-1655

Internet

<http://www.3M.com/CA/occsafety>

Technical Assistance In Mexico

01-800-712-0646

5270-2255, 5270-2119 (Mexico City only)

Technical Assistance In Brazil

0800-132333

Fax On Demand O.U.S. Locations

1-651-732-6530

3M Occupational Health and Environmental Safety Division

3M Center, Building 235-2W-70

St. Paul, MN 55144-1000