

Knock-Down Disposable Roof Anchor



Total Compliance. Absolute Confidence.

The industry's most affordable disposable roof anchor!

A roof anchor that combines ease of installation with performance, safety and exceptional value!

- Installation takes only seconds by simply nailing the anchor to the roof
- This anchor is so economical, it is simply disposed of or "kocked-down" and shingled over when the job is done
- The extremely easy installation and removal provides added safety, productivity and worker satisfaction
- Compatible connection point for your fall arrest system that helps eliminate accidental disengagement for added safety
- Available in 12-packs providing exceptional value
- OSHA compliant and fall arrest rated for complete safety

Knock-Down Disposable Roof Anchor



Ultimate Protection and Safety Our Knock-Down disposable roof anchor is a simple and safe residential and light commercial construction solution. This anchor can have significant impact on jobsite safety while reducing injuries and costly insurance company claims. The unique design provides workers with a fall protection anchor during initial construction, and can simply be "knocked-down" and shingled over when the job is complete.

Simple, Fast & Efficient Installation

The roof anchor is quickly installed by first bending the anchor into shape and conforming it to the roof. Then, simply nail it into place through sheathing and truss on the roof or peak using ten 16d nails. Refer to the user instruction manual for detailed and complete installation details.

Standards and Warranty Reliability that saves you worry, time and money. Complies with OSHA 1926.502 requirements. The reputation of Protecta stands behind every one of our products supported by a two year warranty on parts and workmanship.

MODEL 2103680



Roof Anchor Models:

2103680: 12-Pack of Knock-Down Disposable Roof Anchors with 120 16d Nails (10 for each anchor)


Specifications:

Material: Zinc plated steel **Nails:** 120 16d nails (10 for each anchor) **Capacity:** 310 lbs. (139.5 kg) **Weight:** 0.9 lbs. **Minimum Breaking Strength:** 1,800 lbs. - rated for fall arrest **Compliance:** OSHA 1926.502

Anchor Preparation



Anchor Installation & Placement

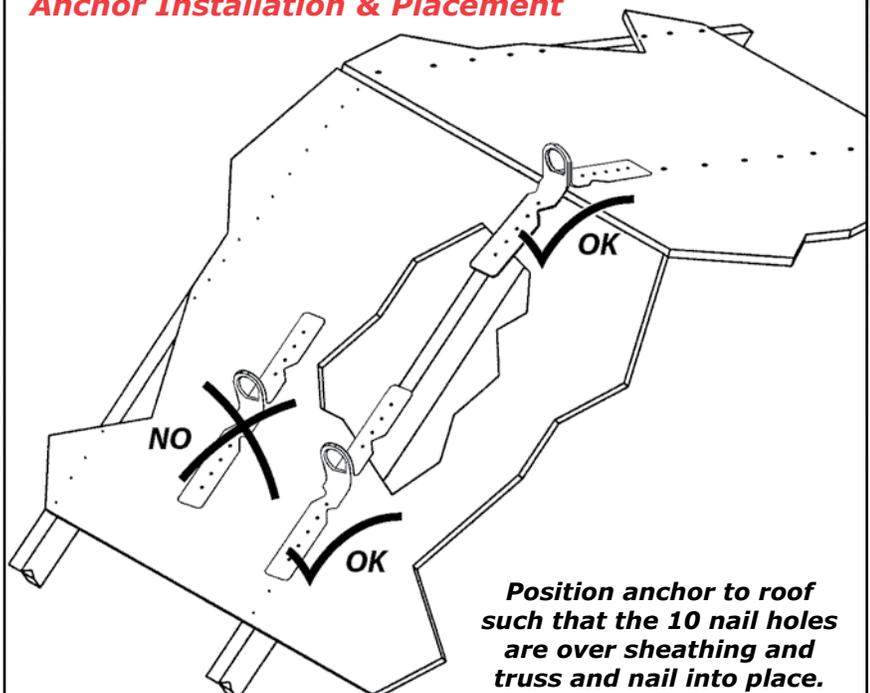

Capital Safety:

USA: 800-328-6146
Canada: 800-387-7484
Asia: +852 2992 0381
Northern Europe: +44 (0) 1928 571324
Europe, Middle East & Africa: +33 (0) 497 10 00 10
Australia/New Zealand: 800-245-002
Or visit: WWW.CAPITALSAFETY.COM