


Products *you* can trust.
Training *you* can use.
Engineered Services *you* can depend on.




The FP Diamond™ Lanyard


[Raising the standard for Shock-Absorbing Lanyards]

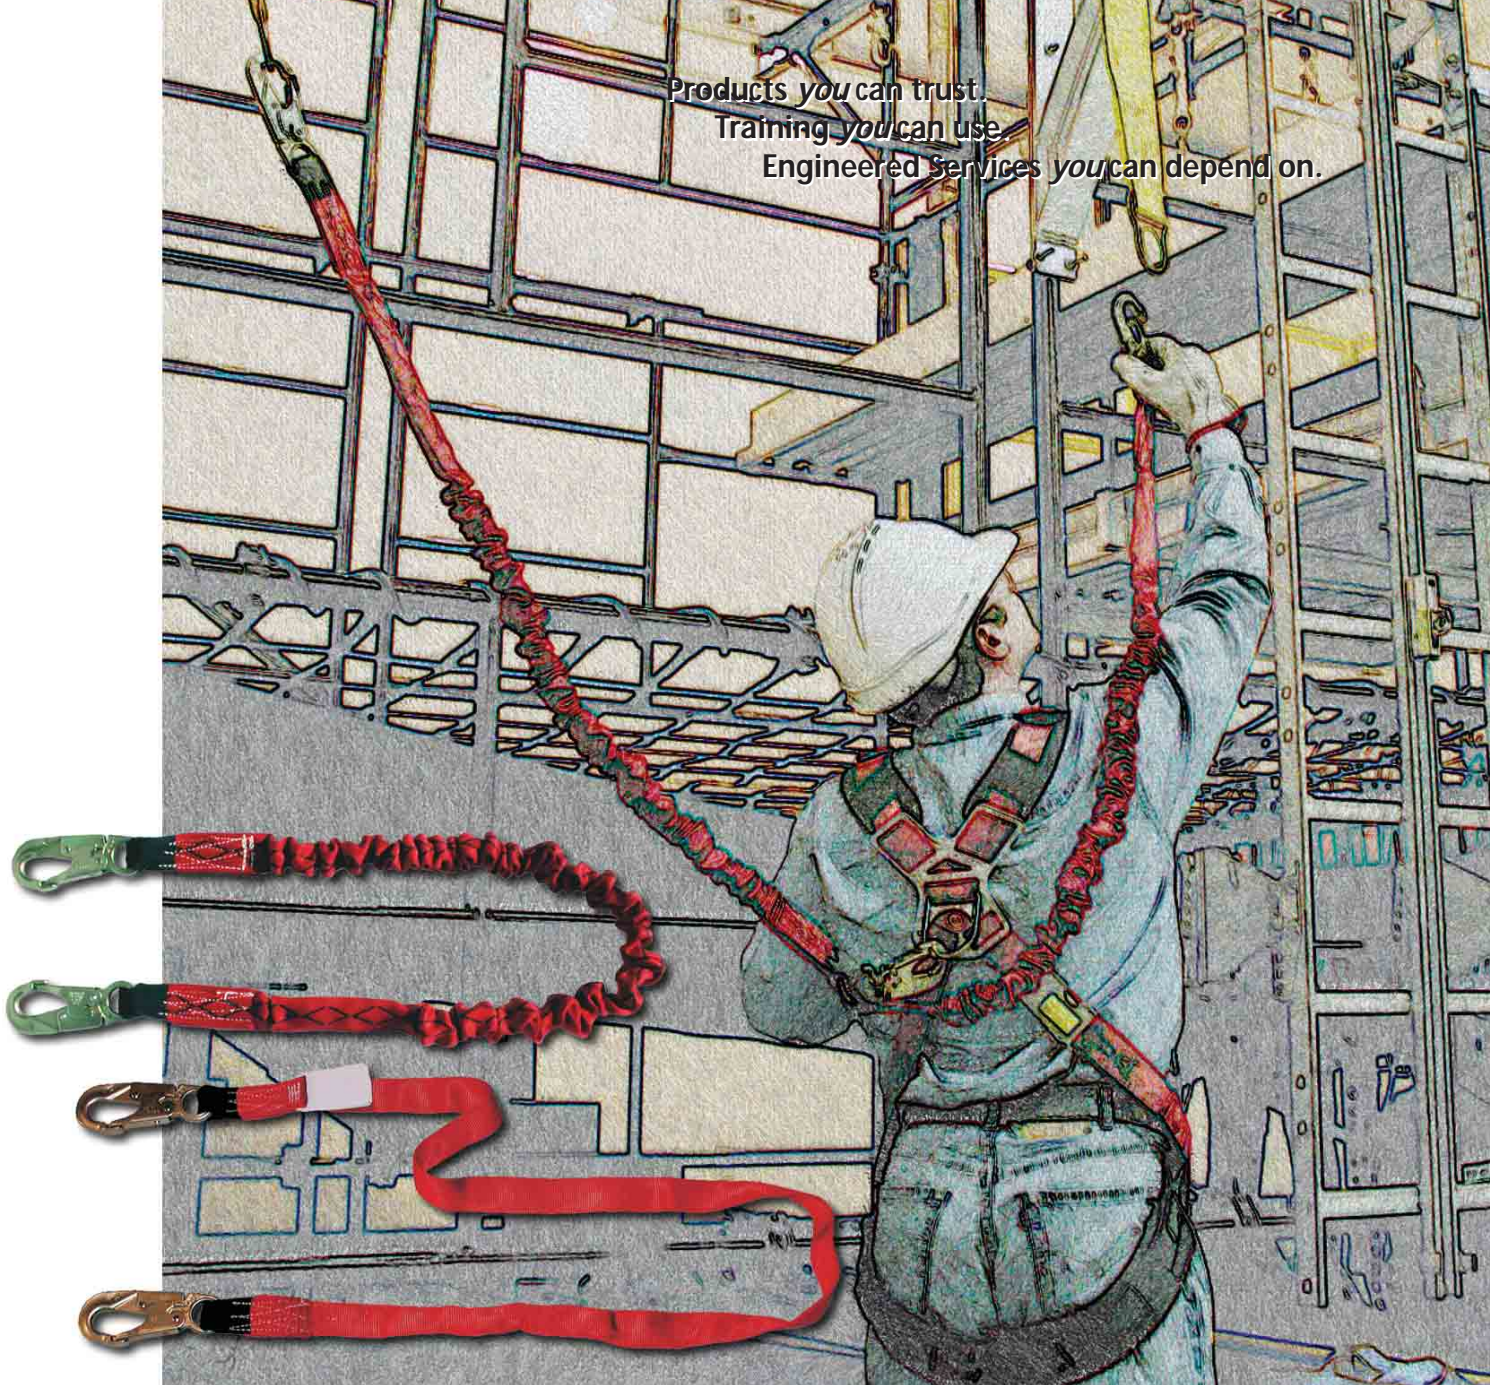

The FP Diamond Lanyard

The FP Diamond shock absorbing lanyard raises the standard for shock absorbing lanyards with these exciting features:


- Durable polyester sheath for increased abrasion and UV resistance
- Keeps fall arrest forces below 900 lbs
- Available in both single and twin leg configurations
- Highly visible deployment tag
- Pouchless design
 - ➔ More comfortable to wear
 - ➔ Lighter weight
- Assemble To Order flexibility allows you to order the exact options, and only the options, you want
- Meets OSHA regulations, ANSI A10.14, ANSI Z359.1, and is CSA certified 

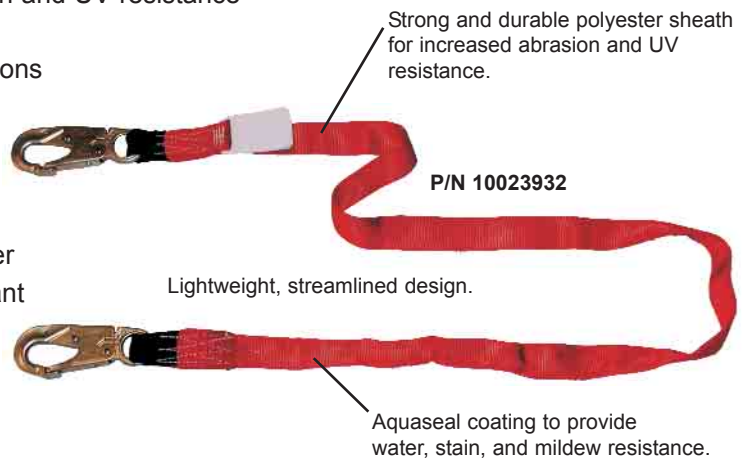

The FP Diamond Expanyard

In addition to the exciting features of the FP Diamond Lanyard, the FP Diamond Expanyard features:

- Elastic design reduces trip hazards and snag hazards
- 6' Diamond Expanyard contracts to 4.5'
- 10' Diamond Expanyard contracts to 7'

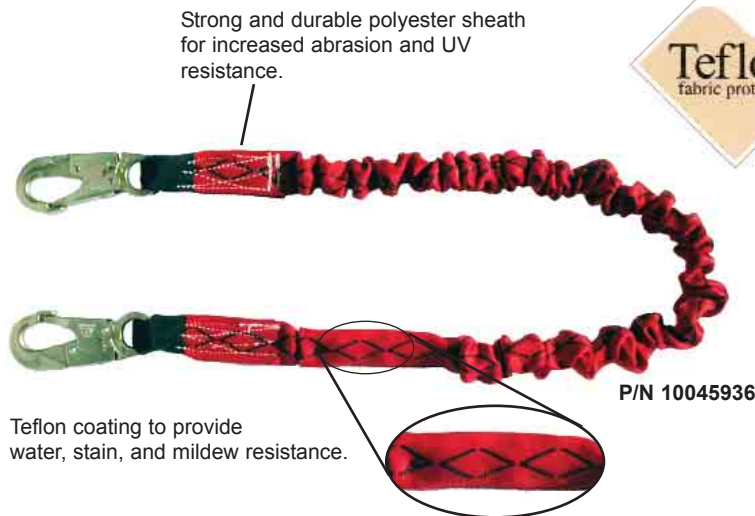

The 6' Diamond Expanyard offers a full 6' range of motion when in use. It contracts to 4.5' when not in use to reduce trip and snag hazards.



Swivel Snaphook on the Twin-leg FP Diamond Lanyard prevents the lanyard from tangling during use.



ATO (Assemble To Order) Matrix for the Diamond Lanyard

Approval		Style of Lanyard		Single/Twin Leg		Anchor Connector			Anchor Connector (2nd Leg - Twin Only)			User Connector		Length	
N C	Non-CSA CSA	1	Non-Expanyard	1	Single	01	HL2000 Snaphook	00	None	01	Hitch Loop*	0	4'		
		2	Expanyard	2	Twin	02	RL20 Snaphook	01	HL2000 Snaphook	02	HL2000 Snaphook	1	5'		
					03	Coated RL20 Snaphook	02	RL20 Snaphook	03	RL20 Snaphook	2	6'			
					04	HL64 Snaphook	03	Coated RL20 Snaphook	04	Coated RL20 Snaphook	3	10**			
					05	GL3100 Snaphook*	04	HL64 Snaphook	05	Swivel HL2000 Snaphook					
					06	LS Snaphook	05	GL3100 Snaphook*	06	LS Snaphook					
					07	LI Snaphook*	06	LS Snaphook	07	LI Snaphook*					
					08	AL64 Snaphook*	07	LI Snaphook*							
					09	FP5K Snaphook*	08	AL64 Snaphook*							
						09	FP5K Snaphook*								

A-DIA										
Part Number										Quantity

- ATO orders ready to ship in 2 - 5 days after receipt of order
- All Twins must have a Swivel HL2000 as the User Connector (Option 5)
- Diamond Expanyard is not available in 4' and 5' lengths

FP Diamond Shock Absorbing Lanyards Ordering Information

Part No.	Harness Connection	Anchorage Connection	Expanyard	Twin-Leg	LENGTH			
					4'	5'	6'	10'
10023932	HL2000	HL2000						X
10023933	HL2000	HL64						X
10023970	Swivel HL2000	(2) HL2000		X				X
10023971	Swivel HL2000	(2) HL64		X				X
10023938	HL2000	HL2000						X
10023939	HL2000	HL64						X
10023936	HL2000	HL2000				X		
10023937	Swivel HL2000	(2) HL2000		X		X		
10035039*	Sewn Loop	HL2000				X		
10045936	HL2000	HL2000	X					X
10045938	Swivel HL2000	(2) HL64	X	X				X
10047290	Swivel HL2000	(2) GL3100	X	X				X
10053011	LS Snap	LS Snap						X
10053012	LS Snap	GL3100						X
10053013	LS Snap	(2) GL3100		X				X
10053014	LS Snap	LS Snap	X					X
10053015	LS Snap	GL3100	X					X
10053016	LS Snap	(2) GL3100	X	X				X
10053580	HL2000	HL2000			X			
10053590	Swivel HL2000	(2) HL64		X	X			
10053599	LS Snap	LS Snap			X			
10053722	Sewn Loop	HL2000			X			

*Actual length is 5'6"

ADDITIONAL GREAT PRODUCTS FROM MSA

TechnaCurv™ Full Body Harness

The TechnaCurv Full Body Harness throws a curve to the ordinary harness with many new features never before seen in a full body harness:

- Curvilinear Comfort System
- Secure-Fit buckles
- Visco-Elastic Shoulder padding
- Sorbtek fabric on shoulder and sub-pelvic pads
- Innovative web design
- Variable width webbing distributes weight to increase comfort
- Teflon coated webbing to provide water, stain, and mildew resistance

In addition to the features above, the TechnaCurv harness is designed with downward adjusting torso straps on most models to ease adjustment. This is also the first harness on the market that allows you to order exactly the options you want, and only the options you want, through our Assemble To Order process. All these features combine to provide you with the most comfortable, versatile, unique, and safe harness available today.

Request Bulletin #2300-46 for more information.

TechnaCurv Harness
Part No.
A-NGHN111211103000



APTURA™ LT12 Self-Retracting Lanyard

MSA has set a new standard in the mechanical fall protection market with the Aptura LT12 Self-Retracting Lanyard (SRL). With its solid design and fast-acting brake mechanism, you can be confident that the Aptura LT12 SRL will be there for you when you need it most. The Aptura LT12 SRL features include:

- Durable, engineered thermoplastic housing
- Rugged, impact-absorbing protective bumpers
- Field-replaceable lifeline
- 400 pound working capacity
- Standard lifeline length of 12'
- Lightweight design
- Meets all applicable OSHA regulations, ANSI A10.14, ANSI Z359.1, and is CSA certified

Request Bulletin #2300-51 for more information.

Attaching the snaphook to the integral swivel creates a comfortable, convenient carrying handle.



APTURA LT12 SRL
Part No. 10042171



PointGuard™ Anchorage Connector Strap

The PointGuard Anchorage Connector provides a secure point of attachment for residential and concrete construction applications. The PointGuard Anchorage Connector can be installed in seconds, and when the anchorage connector is no longer needed a worker can simply cut the protruding strap and throw it away. The PointGuard Anchorage Connector is:

- Economical
- Available in 2 models
 - Residential Construction
 - Concrete Construction
- Durable
 - 1-3/4" Polyester Webbing
 - 5000 pound minimum breaking strength

PointGuard Concrete
Anchorage Connector Strap
Part No. 10042794



PointGuard
Residential
Anchorage
Connector Strap
Part No. 10042792

Designed to comply with all applicable OSHA regulations as well as ANSI A10.14 and ANSI Z359.1.

Request Bulletin #2300-62 for more information.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



Corporate Headquarters
P.O. Box 426, Pittsburgh, PA 15230 USA
Phone 412-967-3000
www.MSAnet.com
U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398
MSA Canada
Phone 1-800-MSA-2222
Fax 905-238-4151
Warehouse locations: Edmonton and Toronto
MSA Mexico
Phone 52 (2) 1 22 57 30
Fax 52 (5) 3 59 43 30
MSA International
Phone 412-967-3354
Fax 412-967-3451

Offices and representatives worldwide
For further information:

