

General-purpose protective coverall provides both liquid splash and particulate protection


Economical and **lightweight material** for breathability and user comfort

Strong and durable, the microporous film provides protection, wet or dry

Blood borne pathogen protection

Meets ANSI/ISEA 101-1996 sizing standards

Manufactured in an ISO 9002 registered facility

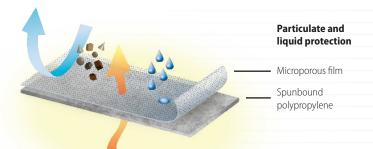

MATERIAL SPECI	MATERIAL SPECIFICATIONS				
Basis weight	60g/m2	Trap tear MD	10.1 lbs.		
Thickness	12 mil.	Trap tear CD	5 lbs.		
Grab tensile MD	22 lbs.	Abrasion Resistance	1020 cycles		
Grab tensile CD	15 lbs.	Ball burst	24 lbs.		

SHIELDTECH 30 ASTM F903 PENETRATION DATA				
Chemical Tested	Concentration %	Test Time	Test Results	
Diazinon	100%	60 min	Pass	
Motor Oil - 40 wt.	100%	60 min	Pass	
Bleach - Household	100%	60 min	Pass	
Isocyanate Based paint	100%	60 min	Pass	
Sodium Hydroxide	50%	60 min	Pass	
Sodium Hypochlorite	10%	60 min	Pass	
Blood	Challenge Fluid Liter 3.20 x 10^8 (PFU/mL)	Assay Results PFU/mL <1	Pass	



Ordering Information

SHIELDTECH 30 White Coveralls with Hood and Boots, Elastic Wrists					
STYLE	SIZE	CATALOG NUMBER	CASE SIZE		
	Large	53100	25		
	XLarge	53101	25		
	2XLarge	53102	25		
	3XLarge	53103	25		

SHIELDTECH 30 White Coveralls with Hood and Elastic Wrists and Ankles					
STYLE	SIZE	CATALOG NUMBER	CASE SIZE		
	Large	53118	25		
	XLarge	53119	25		
	2XLarge	53120	25		
	3XLarge	53121	25		
	4XLarge	53122	25		



800.767.6933 www.aramsco.com