

# 200 SERIES PUMPS - 207V/M58



## SPECIFICATIONS


- Max Pressure (psi)** 800
- Open Flow (gpm)** 2.21
- Seals** V-Rings
- O-Rings** Buna
- Inlet Ports (2)** - 3/8" NPT (F)
- Discharge Ports (2)** - 3/8" NPT (F)
- Max Fluid Temp (°F)** 140
- Voltage** Dual 120/230VAC 50/60Hz

## MATERIALS

- Body** Anodized Aluminum
- Plunger** Stainless Steel
- Valves** Stainless Steel
- Fasteners** Stainless Steel

## EXAMPLE

CAM	AMPS	PSI	GPM
.125	4.34	500	1.10

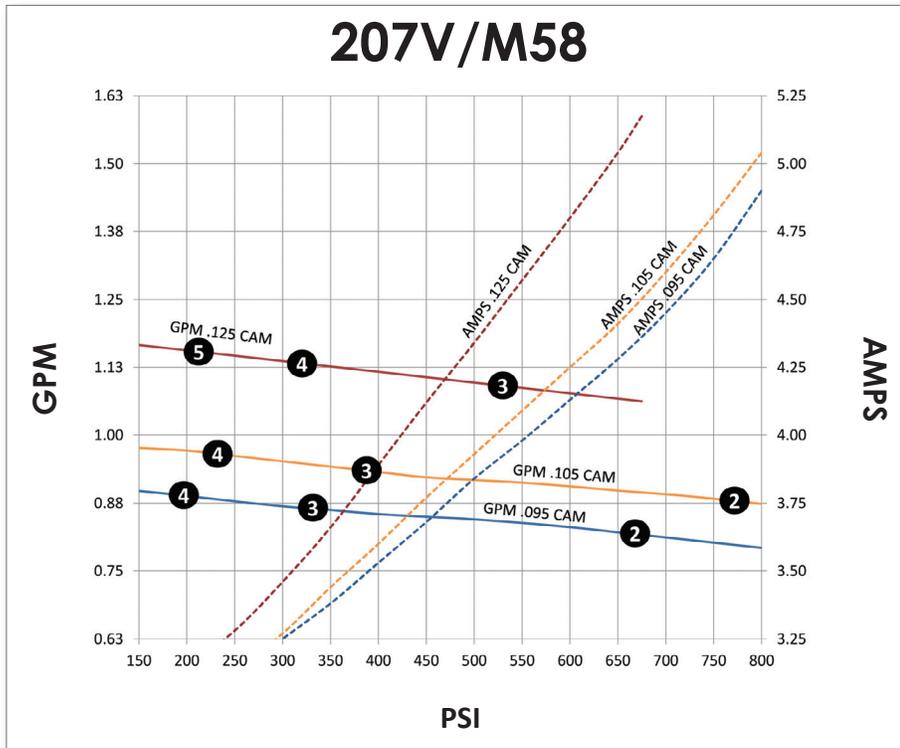

230V CHART CAN BE FOUND @ [WWW.PUMPTec.COM](http://WWW.PUMPTec.COM)

Data recorded pumping water at room temperature and 115V AC power. Actual performance will vary with voltage, application, and mfg tolerances. Copyright PumpTec, Inc. 2014

- Spraying Systems Co. nozzle sizes
- \* Standard cams shown, more cams available upon request

