



Bridgepoint Systems Odor Sealer Urine & More eliminates strong odors on contact and seals surfaces to prevent stains from leeching into the top coat. Suitable for use on untreated wood, sheetrock, masonry, concrete, and other porous hard surfaces.


OTHER BENEFITS

- Water-based solution is easily rinsed from equipment after use
- Durable and adheres to many types of surfaces
- Solvent free formulation
- No Prop 65 ingredients
- One-coat application

DIRECTIONS

1. Clean surface with appropriate cleaner based on surface requirements.
2. Thoroughly deodorize areas with direct spray or wet fogging of Hydrocide or other odor encapsulate.
3. Wait until surface is dry and apply Odor Sealer to seal in remaining odors and prevent stains from wicking to surface. Test in a small area to determine proper bonding. Mix and apply like paint using brush, roller or airless sprayer. Two coats may be necessary on heavily stained or porous surfaces.
4. Odor Sealer dries clear, with a slight milky color. Once dry, surface may be painted, or carpet and tile installed.

Coverage: 100 (most porous) to 400 (least porous) sq. ft. per gallon.

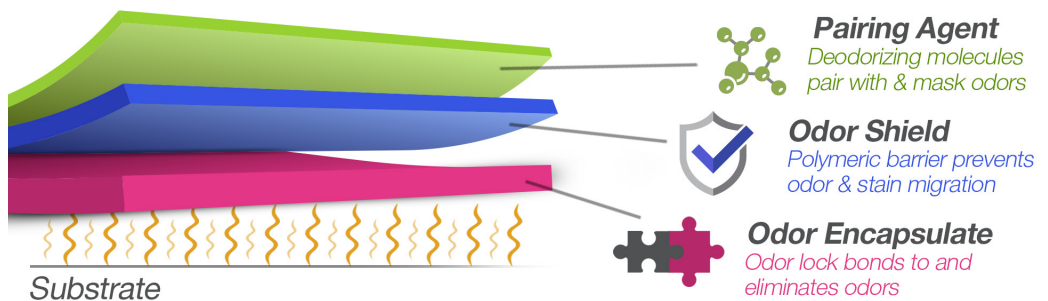

Available in Gallons and 4 x 1 gallon cases RTU pH: 7.0 Part # 1665-7518

USES 3 PROVEN METHODS TO ELIMINATE ODORS

1. **PAIRING AGENT:**
Deodorizing molecules pair with and mask odors
2. **ODOR SHIELD:**
Polymeric barrier prevents odor and stain migration
3. **ODOR ENCAPSULATE:**
Odor lock bonds to and eliminates odors



Problem Solved...™

Bridgepoint Systems | 4282 South 590 West Salt Lake City, UT 84123
www.bridgepoint.com • (800)-658-5314

See Safety Data Sheet at www.bridgepoint.com/sds for safety and regulatory information.