

Miller MiniLite[®] Fall Limiter Series

Description

The Miller MiniLite[®] Fall Limiter is an 11 ft. (3.3 m) self-retracting web lanyard with a quick-activating braking system that limits free falls.

Materials

Housing:	Thermoplastic Cover
Mainspring:	Stainless Steel
Brake Pawls:	Stainless Steel
Main Shaft:	Stainless Steel
Snaphook:	Drop Forged Steel
Lifeline:	1-in. x 06-in. Polyester
Thread:	No.415 6-cord bonded 3-strand polyester
Carabiner:	Zinc plated steel (<i>if applicable</i>)
Jaw & Jaw	
Swivel:	Stainless Steel (<i>if applicable</i>)


Technical

Max. Working Load:	310 lbs. (141kg)
Working Length Capacity:	11 ft. (3.4m)
Max. Arrest Distance:	39-in. (990.6m)
Avge. Arresting Force:	1,350 lbs. (6kN) (When tested to ANSI Z359.14)
Max. Peak Arresting Force:	1,800 lbs. (8kN) (When tested to ANSI Z359.14)
Max. Peak Arresting Force:	900 lbs. (4kN) (When tested to CSA Z259.2.2)
Ultimate Strength:	3,000 lbs. (13.34kN)
Lifeline Tension:	2 lbs. - 13 lbs. (8.9N – 57.2N)

Certification:

Meets OSHA 1926.502, 1910.66 , ANSI A10.32,
*ANSI Z359.14-2012 Class B.

*ANSI Z359 and CSA Z259-12-11 compliant for connectors which meet the 3,600 lb gate requirements.

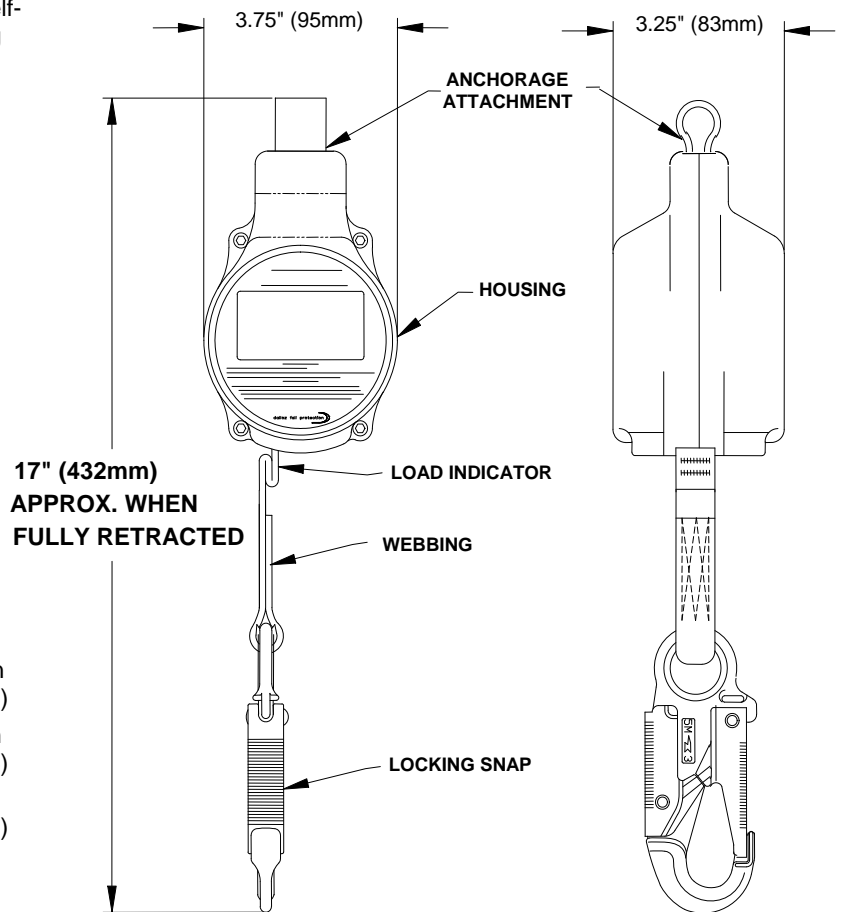

Miller MiniLite® Fall Limiter Series



Model No.	Description
FL11/11FT	MiniLite w/out anchorage connector (with non-swivel snaphook)
FL11-2/11FT	MiniLite w/stainless steel swivel shackle
FL11-4/11FT	MiniLite w/attached 3-ft. (1m) cross-arm strap
FL11-5/11FT	MiniLite w/locking rebar hook [2 ½ -in. (63mm) gate opening]
FL11-7/11FT	MiniLite w/locking snap hook [¾-in. (19mm) gate opening]
FL11-9/11FT	MiniLite (FL11) w/no snap hook on the web lanyard end
FL11-10/11FT	MiniLite w/swivel shackle (FL11-2); no snap hook on the web lanyard end
FL11-11/11FT	MiniLite (FL11-6) w/rebar hook on web lanyard end
FL11-12/11FT	MiniLite w/attached captive-eye carabiner
ANSI Z359.14 and CSA Z259.12-11 Compliant	
FL11-0/11FT*	MiniLite w/out anchorage connector (with swivel snaphook)
FL11-1/11FT*	MiniLite w/steel twist-lock carabiner
FL11-3/11FT*	MiniLite w/carabiner and swivel shackle
FL11-6/11FT*	MiniLite w/rebar hook swivel shackle
FL11-8/11FT*	MiniLite w/snap hook and swivel shackle

All units are equipped with a Fall Indicator, in the event of a fall, a flag deploys to indicate the unit has been subjected to fall arresting forces and should be removed from service.

MILLER®

by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

⚠ WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.