



SpinerGY Stone Polishing Pads



Instructions For Proper Use



These pads are meant to be used to remove wear and achieve a wide variety of finishes from dull hone (no shine) to a high polish on Marble, Travertine or Limestone floors, walls or counter tops with little to no lippage (uneven tiles).

Follow these simple steps to achieve great results with less mess in less time without the use of harsh chemicals.



FOR USE WITH FLOOR MACHINES 17" - 20" (175-350 rpm)

1. Sweep or vacuum to remove all abrasive soils.
2. Clean surface with SpinerGY Stone Perfect.
3. Rinse surface thoroughly.
4. Center "SpinerGY Pad" on drive plate on floor machine.
5. 175 rpm machines work best with 30lb. drive plate. 300-350 rpm machines do not require extra weight.
6. Apply enough water to 2' x 5' area to lightly wet the surface. No need for huge puddles.
7. Move the floor machine in an oval pattern, counter clockwise to keep the water inside the work area.
8. Check surface after 15-30 seconds to see if desired results are achieved.
9. If YES, repeat steps 6-8 on the rest of the room one section at a time.
10. Overlap sections by 4" - 6" to keep an even finish.
11. If NO, repeat steps 7 & 8 until desired result with that grit is achieved (usually 15-45 seconds per 2' x 5' area).
12. Rinse whole area between grits.
13. Rinse pad thoroughly after each use and allow to dry.
14. Repeat steps 6-10 with grits as you go to a higher number until desired finish is achieved.

FOR USE WITH HAND POLISHER 7" Variable Speed (600-3000 rpm)

1. Sweep or vacuum to remove all abrasive soils.
2. Clean surface with SpinerGY Vivid.
3. Rinse surface thoroughly.
4. Center "SpinerGY Pad" on drive plate on hand polisher.
5. Apply enough water to 2' x 3' area to lightly wet the surface. No need for huge puddles.
6. At lowest speed setting, move the tool in an oval pattern, counter clock to keep the water inside the work area.
7. Check surface after 15-30 seconds to see if desired results are achieved.
8. If YES, repeat steps 6-8 on the rest of the room one section at a time.
9. Overlap sections by 4" - 6" to keep an even finish.
10. If NO, repeat steps 7 & 8 until desired result with that grit is achieved (usually 15-45 seconds per 2' x 5' area).
11. Rinse whole area between grits.
12. Rinse whole area between grits.
13. Repeat steps 6-10 with grits as you go to a higher number until desired finish is achieved.

TIPS

1. Use more water with lower grits and less water with higher grits.

2. To verify if you are finished with any grit level, follow these steps: Use pad in one spot for 20-30 seconds and squeegee water back, if it looks better than the rest of the area, keep working it.


3. Use more weight or pressure and less water on grits 3,000 and above.

Visit our website to



See Pads in Action

ALL PADS ARE COLOR CODED BY GRIT

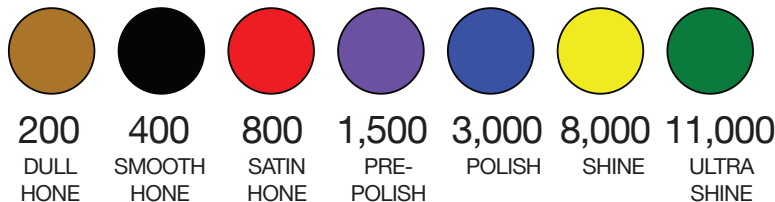

BRIDGEPOINT SYSTEMS by BRIDGEPOINT SYSTEMS

Visit us online at:
www.bridgepoint.com

(800) 637-3789 | www.bridgepoint.com